


SP1360W

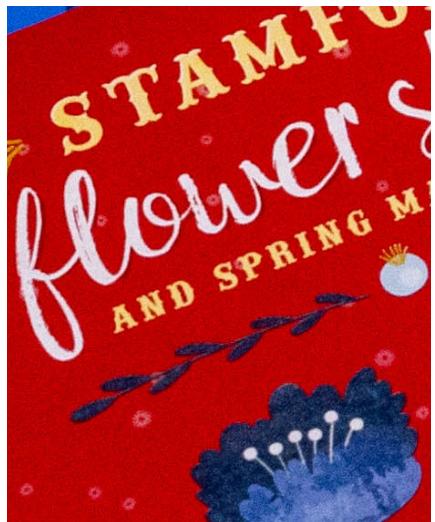

Print in color and white, on substrates that you would never have thought possible with a short-run printer. Designed to meet the needs of a diverse range of specialty print applications, the SP1360W delivers vibrant, high-quality color printing on a wide range of media. No matter if you're small business, commercial print provider or anything in between, the SP1360W has something to offer. The addition of white toner lets you do what most short-run print devices can't. Broaden your horizons with stunning white-on-color and brilliant color on dark media.

- Prints with CMYK plus White toner
- Prints White under CMYK in a single pass for full color on dark media
- End user replaceable consumables ensures minimum down time
- High-density White toner for outstanding coverage on color stock
- Up to 50 ppm CMYK/Mono, and 60 ppm COM 10 envelopes
- Low total cost of ownership (TCO)

Specifications

Print Speed	CMYK/Mono CMYKW	60 ppm COM 10 envelopes, 50 ppm Letter-size sheets, 27 ppm Tabloid sheets 45 ppm Letter-size sheets
Time to First Page	CMYK/Mono	Approx. 8 seconds
Duty Cycle	Printers	300,000 pages max per month
Print Quality	Resolution	Up to 1200 x 1200 dpi; ProQ 1200 x 600 x 16 levels
Memory	RAM (Standard/Max) Processor	2 GB 1.2 GHz ARM CPU
Compatibility	Printer Languages Connectivity Operating Systems Network Protocols	Adobe® PostScript 3TM, PCL® 6, PCL 5c, XPS® High-speed USB 2.0, 10 Base-T/100 Base-TX/1000 Base-T Ethernet Windows 10, Windows® 8, Windows 7, Windows Vista®, Windows XP, Windows Server 2012, Windows Server 2008, Windows Server 2008 R2, Windows Server 2003; Mac® OS 10.3.9 – 10.9 TCP/IP, EtherTalk
Color Features/ Solutions	Standard	PostScript® driver supports trapping; Embedded ICC Profile-based workflow; Simulations for SWOP, ISO Coated, Japan Color; PDF Direct Print; PS Gamma Adjust; and Color Correct
Media Handling	Media Sizes Media Weight	Trays 1 & 2: Up to 12.00" x 18.00". Multi-purpose Tray: Min 2.52" x 3.50" up to 13.00" x 52.01" Trays 1 & 2: 52 – 320 gsm. Multi-purpose Tray: 80 – 360 gsm
Media Capacity	Multi-purpose Tray Trays 1 & 2 High-Capacity Feeder (Optional)	Up to 310 sheets Up to 580 sheets each Up to 1740 sheets (3 trays, 580 sheets each)
Media Output	Face Down Face Up	Max 610 sheets Max 300 sheets
Environmental	Size (WxDxH) Weight Temperature/Humidity Power Consumption Noise Levels	27.5" x 26.18" x 25.2" (699 mm x 665 mm x 640 mm) 215.2 lb. (97.6 kg) including consumables 50° – 90°F (10° – 32°C)/20% – 80%RH 115V 15A Active 1600W max. /1100W avg.; Standby avg. 40W; PowerSave mode 30W or less; Sleep mode 4W or less; Auto Shutoff 0.4W or less. Printer: Active 57dBA or less; Standby 34dBA or less; PowerSave mode – Inaudible
Warranty	Limited	1 year warranty

