



# FOLDERS

## 352S

The 352S high-speed air feed manual paper folder is perfect for high-volume digital production, featuring an air suction system for coated stocks. With variable speed control, quick adjustments, and continuous reloading, it ensures efficient, quiet operation.

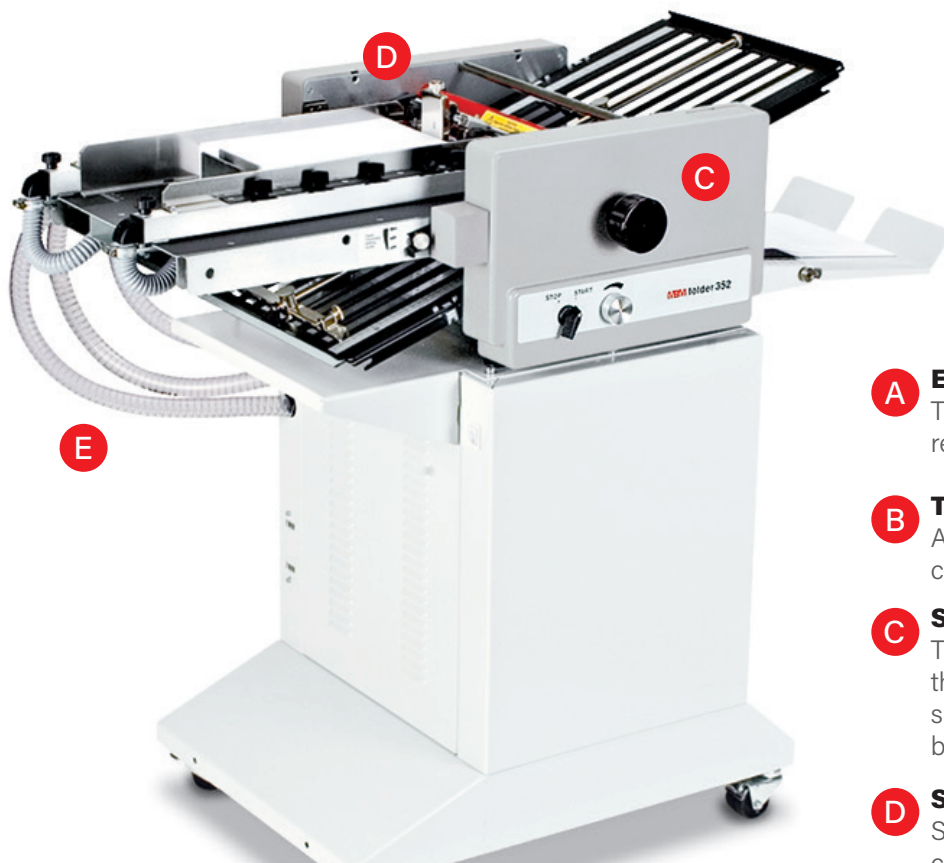

- A ENCLOSED TURBINE BLOWER**  
The low-maintenance blower does not require filter changes.
- B TOP-LOADING PAPER FEED**  
A top-loading paper feed system allows continuous operation.
- C SHEET GAP KNOB**  
This adjustment changes the speed of the suction drum, i.e. the gap between sheets is the result of the speed difference between feed drum and fold rollers.
- D SUCTION DRUM**  
Sheet separation is achieved by the combined action of the rotating suction drum, the paper stop and the air and vacuum.
- E AIR AND VACUUM HOSES**  
Air and vacuum can be modified by means of air-regulating valves. This is necessary because heavy paper grades require more vacuum and air than light paper grades.

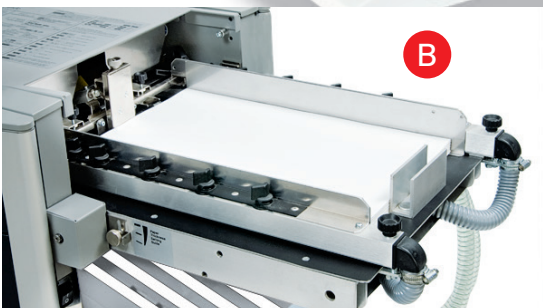

# MBM FOLDERS


## 352S




- Air suction feed system, suitable for coated stocks
- Adjusts in seconds for standard and custom folds
- Variable speed control
- Powered exit conveyor
- Bottom-feed, top-loading design for continuous reloading and dependable sheet separation
- Polyurethane foam rollers eliminate the need for fold roller pressure settings
- Turbine blower fully enclosed for quiet operation
- 2 fold plates
- Heavy-duty, non-flexing side frames
- Needle bearings for high-speed production
- Mounted on casters

### Accessories:


AC0626:	Silencing covers	AC0690:	Standard perforator, short
AC0630:	Slitter	AC0691:	Standard perforator, medium
AC0631:	Scorer, narrow	AC0692:	Blade perforator, short
AC0632:	Scorer, medium	AC0693:	Blade perforator, medium
AC0633:	Scorer, broad	AC0694:	Blade perforator, long
AC0646:	Extended delivery		




Single




Letter




Zigzag



Double parallel



Fold-out



Gate

### Specifications:

Speed (sheets per hour)	30,000*	Electrical requirements	150 V, 60 Hz
Paper size	3.3" x 4.75" to 12.6" x 17.75"	Dimensions (D x W X H)	22.25" x 51.25" x 43.5"
Paper weight	13 to 110 lbs. / 290 gsm	Shipping weight	312 lbs.
Sheet capacity	450		

\* May vary due to variations in paper and power supply

www.mbmcorp.com  
843-552-2700

